



AX10 SpotMax™

Data sheet

Optical

Colours
RGBAW
Total LED power
135W
Luminous Flux
3350Lm
Emittance (@2m)
10350Lx

CRI
92
Strobe
0-25Hz
Beam Angle
13°

Pixels
1

Construction

Housing
Aluminium
IP Rating
IP65
Relative humidity
0-100%
Operating Temperature
0-40 °C
32-104 °F
Weight
7.98kg
17.5Lbs
Dimensions
279 x 296 x 253 (mm)
10.9 x 11.6 x 9.9 (inches)
Environment
Indoor | Outdoor

Accessories



Powercon True1 cord
AX10-CHR (Included)



32° Flood diffusor
AX10-DDSK (Included)



13°x 46° Wallwash diffusor
AX10-WWDSK (Included)



13°x 46° Rotatable diffusor
AX10-ROTAD





Charging case
AX10-CHRCSE



Super bolt
AX10-BLT

Electrical

Battery
Samsung Lithium-ion
Battery Lifetime
70% after 300 cycles
LED Lifetime
50.000 Hours
Charging time (nominal)
7 Hours
Input Voltage
90-264V 47-63Hz
Input Current
1.8A/115VAC ~ 1.0A/230VAC
Inrush Current
Cold start 70A/230VAC

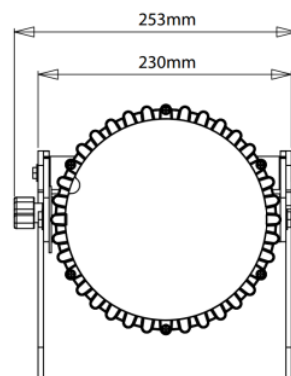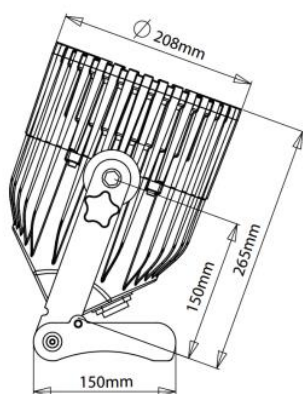

Control

Wireless Modules
865-870MHz
902-928MHz
2.4GHz
Range
300m | 330 Yards
DMX
Supports CRMx and W-DMX

