


KS28 SUBWOOFER



Description	High power subwoofer: 2 x 18" amplified by LA12X
Low frequency limit (-10 dB)	25 Hz ([KS28_100])
Maximum SPL¹	143 dB ([KS28_100])
Directivity	Standard or cardioid
Transducers	2 x 18" neodymium, aluminium die cast basket
Acoustical load	Bass-reflex enclosure, L-Vents
Nominal impedance	4 Ω
Connectors	IN: 4-point speakON®
Rigging and handling	Flush-fitting 2-point rigging system 6 ergonomic handles 2 ground runners 8 side runners
Weight (net)	79 kg / 174 lbs
Cabinet	Premium grade beech and birch plywood
Front	Steel grill with anti-corrosion coating Acoustically neutral 3D fabric
Rigging components	High grade steel with anti-corrosion coating
Finish	Dark grey brown PANTONE® 426 C
IP	IP55

¹ Peak level at 1 m under half space conditions using pink noise with crest factor 4 (preset specified in brackets).

ISOCONTOUR

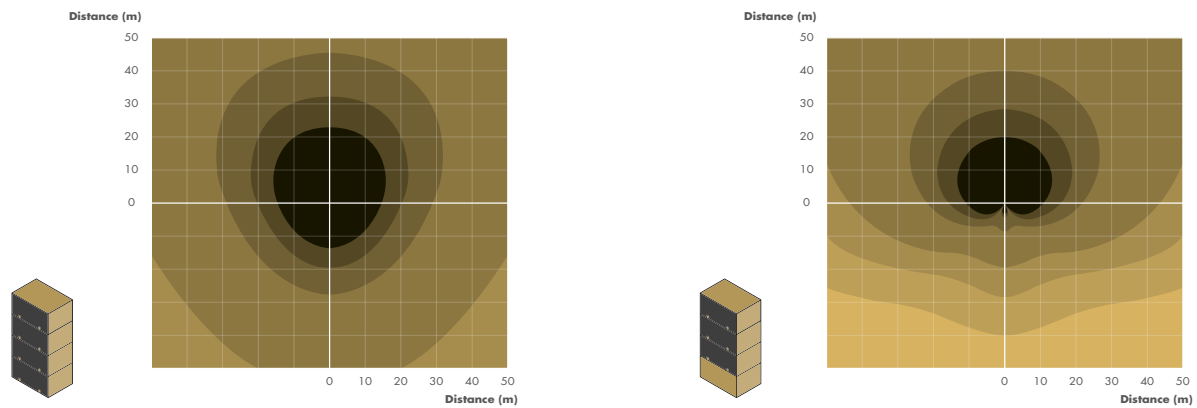

► SPL mapping of a block of four KS28 in standard (left) and cardioid (right) arrangements, using surfaces of equal sound pressure with three dB step colored scale.

DIMENSIONS

